

Sub-Systems Continuous Fiber Lasers

Key Features

- Up to 40 W output power
- PM version available up to 20 W
- Excellent beam quality
- Maintenance free operation
- OEM format or rackmount
- Air cooled

Applications

- Medical / Aesthetics
- Target designation
- Material processing
- Component testing

For more Info

Please contact us at:
Europe & Asia: +33 169 805 833
North America: +1 514 748 4848
+1 888 922 1044
sales@3spgroup.com

ISRUZ

1.5 μm CW High Power Fiber Laser

The ISRUZ is a compact CW fibre laser delivering up to 40 W of output power in standard versions and up to 20 W output power in its polarization maintaining versions, through a near diffraction limited beam.

The excellent beam quality and power stability make this fibre laser a multi-propose tool.


Our patented "Injection Technology" allows the use of highly reliable broad area laser diode pumps, for a cost-effective and maintenance-free operation.

The all fibre design guarantees the robustness of the laser, without any optical parts to align or to stabilize. The simple integration of the system requires no after-installation service.

3SPGroup offers two formats: OEM modules or rackmount.

The ISRUZ is the ideal solution for a broad range of industrial, medical and scientific applications.



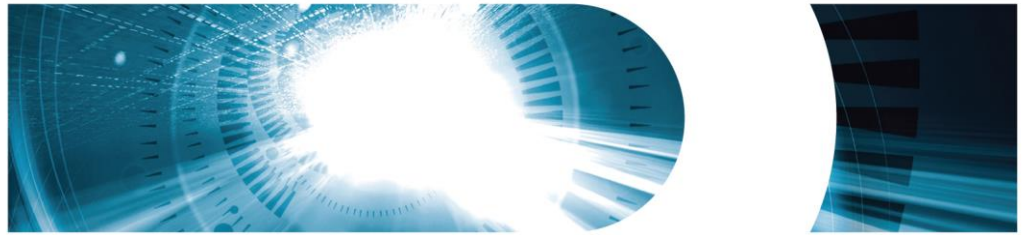


ELECTRO-OPTICAL CHARACTERISTICS


| Parameters | Value | | | | | Unit |
|--------------------------------------|-------------------------|-----------------|-------|------------|-------|-----------------|
| Operating mode | CW - Modulated | | | | | - |
| Central wavelength (1) | 1550 | | 1565 | | | nm |
| Nominal output power | 5 | 10 | 20 | 30 | 40 | W |
| Output power tunability (2) | 10 - 100 | | | | | % |
| Long term stability (3) | 1.5 | | | | | %RMS |
| Modulation bandwidth | up to 3.0 | | | | | kHz |
| Signal linewidth | < 1.0 | | < 3.0 | | | nm |
| Polarization * | Random or Linear | | | Random | | - |
| Polarization extinction ratio (PER) | > 20 | > 18 | > 17 | - | - | dB |
| Output fibre length | 1 | 4 | | | | m |
| Output fibre termination | Collimator | | | | | - |
| Beam diameter (at 1/e ²) | 2.2 | 5 | | | | mm |
| Beam quality | < 1.1 | | | | | M ² |
| Output isolator * | Optional | | | | | - |
| Control mode * | ACC / APC | | | ACC | | - |
| OEM HOUSING | | | | | | |
| Model | OEM45 | OEM65 | | OEM75 | | - |
| Storage temperature | -20 to +60 | | | | | °C |
| Operating temperature (4) | 0 to +50 | | | | | °C |
| Control interface * | RS232 | Analog or RS232 | | RS232 | | - |
| Operating voltage DC | 12 | 24 | | | | V |
| Power consumption | < 50 | < 100 | < 150 | < 250 | < 300 | W |
| Dimensions | 150x150x45 | 230x178x65 | | 270x255x75 | | mm ³ |
| Weight | < 1.0 | < 3.5 | | < 6.0 | | kg |
| RACK HOUSING | | | | | | |
| Model | TKS | | | | | - |
| Storage temperature | 0 to +50 | | | | | °C |
| Operating temperature | +15 to +35 | | | | | °C |
| Control interface | Front panel or USB | | | | | - |
| Operating voltage AC | 88 to 264 (50 to 60 Hz) | | | | | V |
| Power consumption | < 500 | | | | | W |
| Dimensions | 3U 19": 448x451x132 | | | | | mm ³ |

* see the available options codification in the ORDERING INFORMATION section.


- (1) other wavelengths available in the range 1535-1575 nm
- (2) RS232 adjustment or analog output power adjustment (optional)
- (3) over 1h@25°C, 1 sec sampling rate
- (4) optional extended range from -35 °C to +65 °C





MECHANICAL DETAILS – OEM45

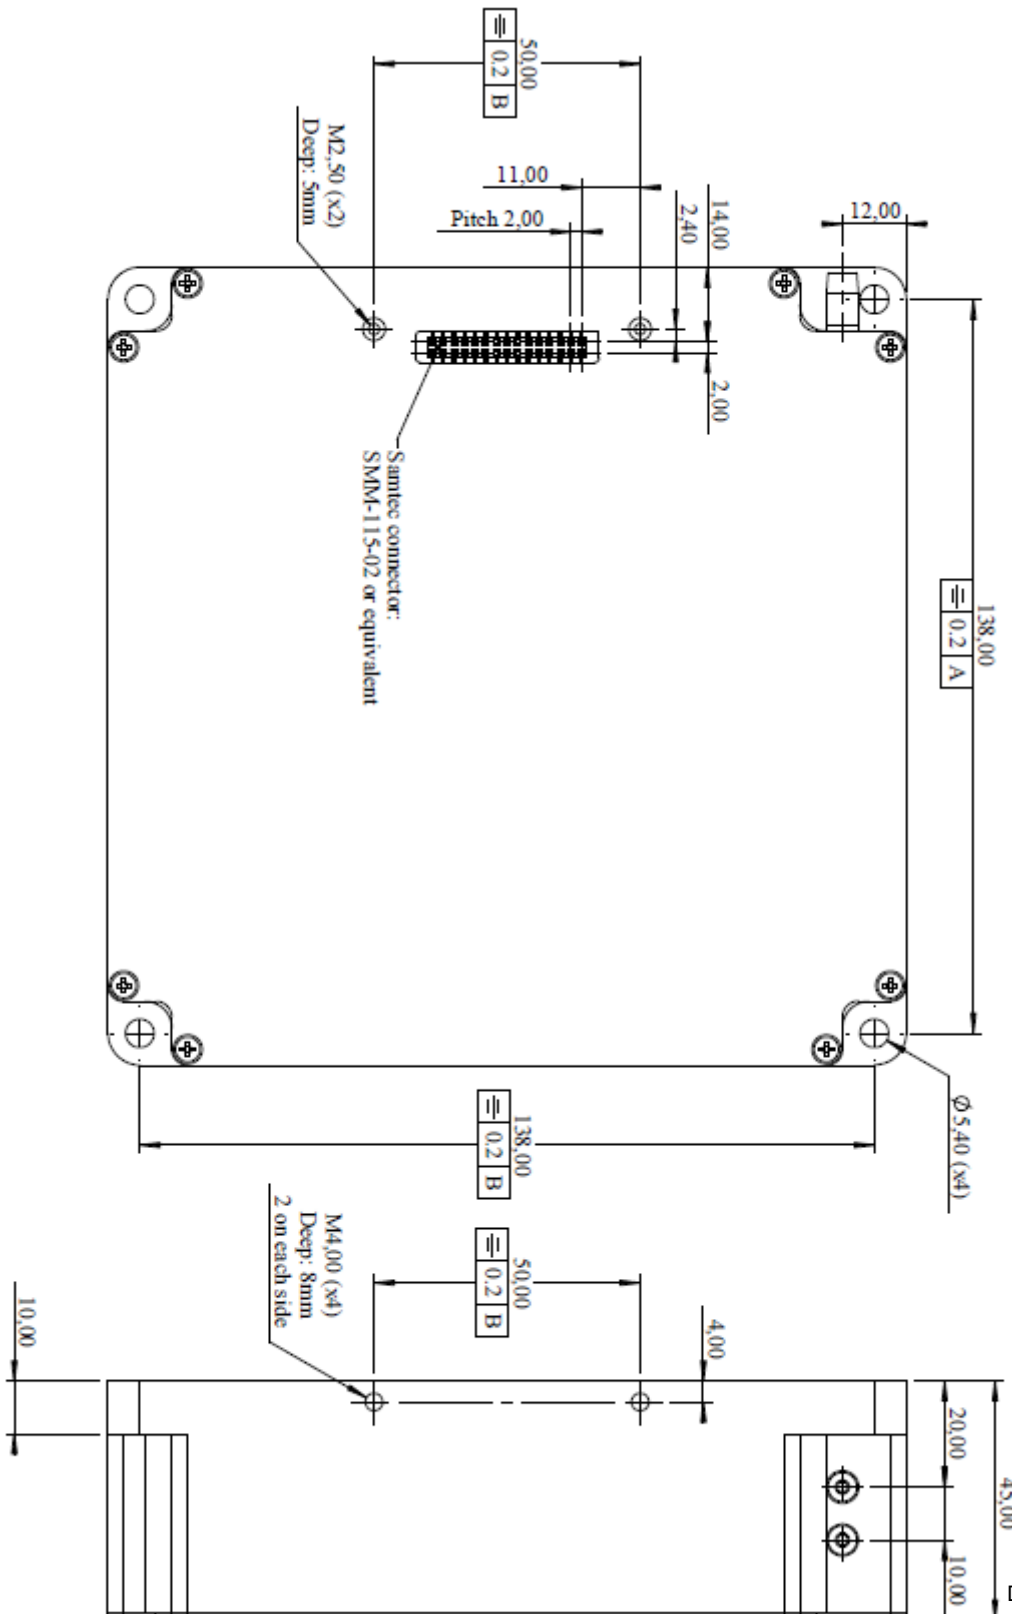


Dimensions are in mm

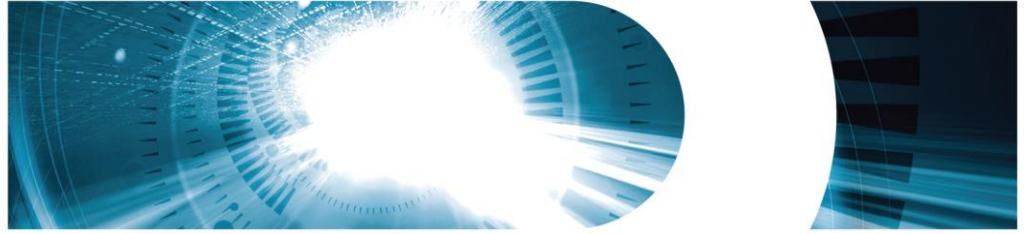


MECHANICAL DETAILS – OEM65

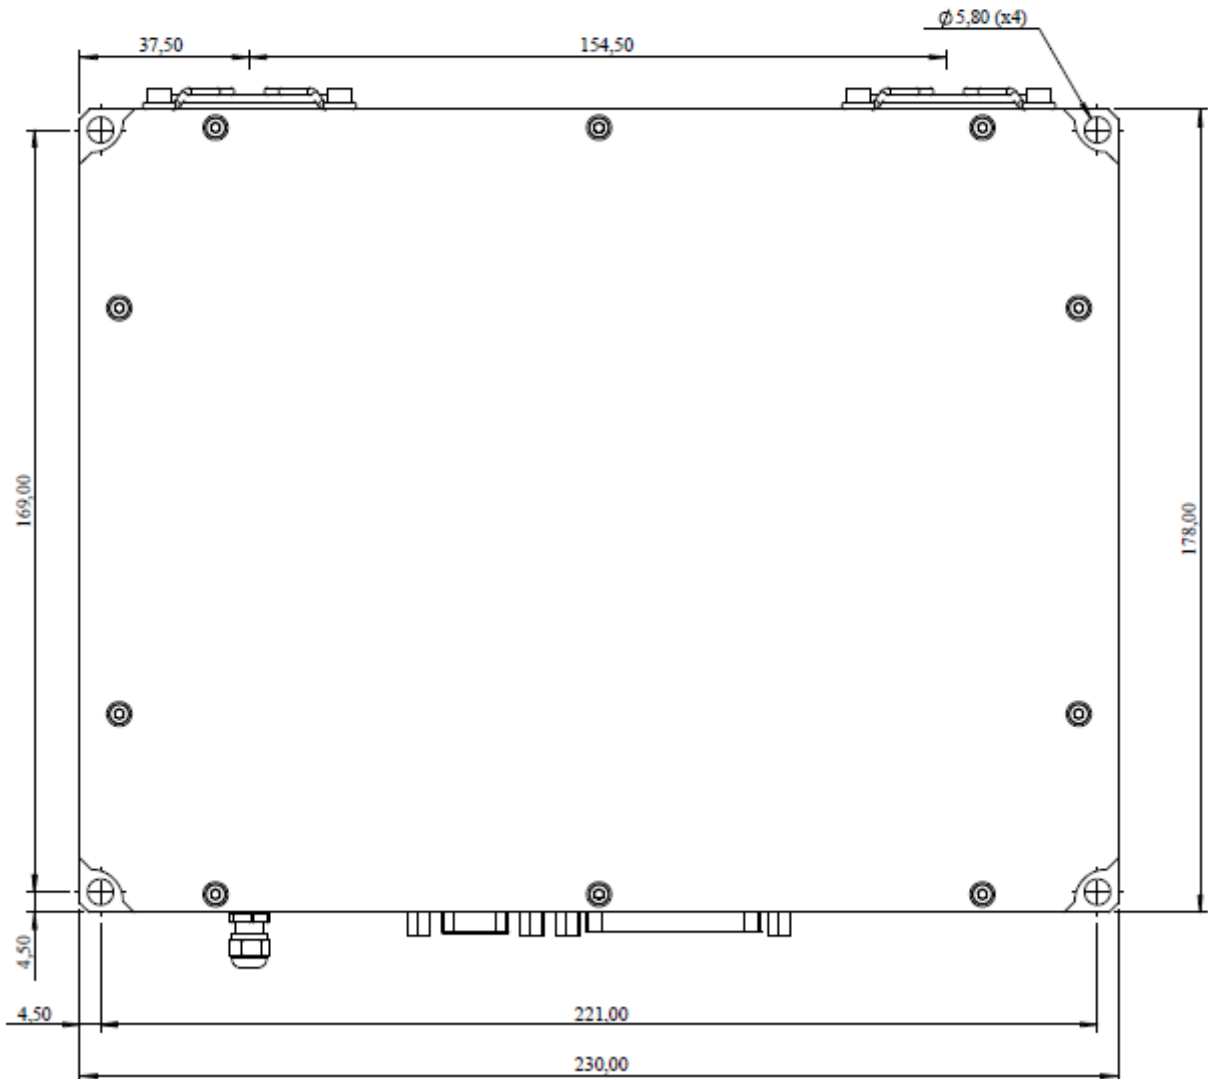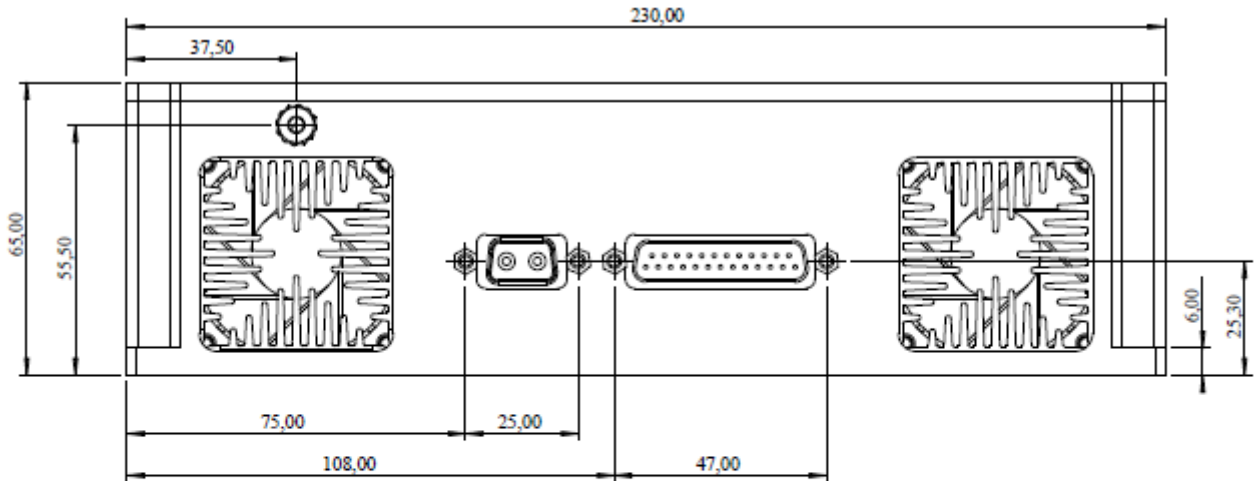


Dimensions are in mm

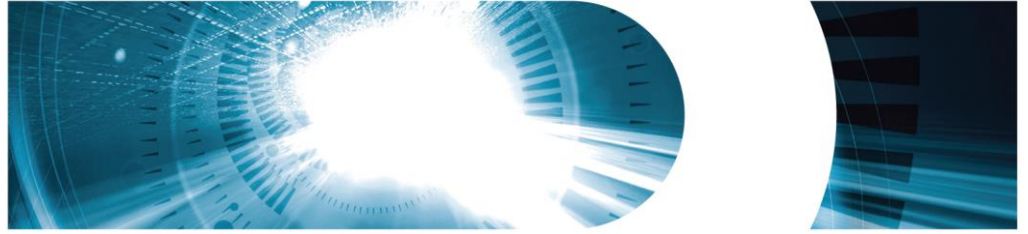

MECHANICAL DETAILS – TKS

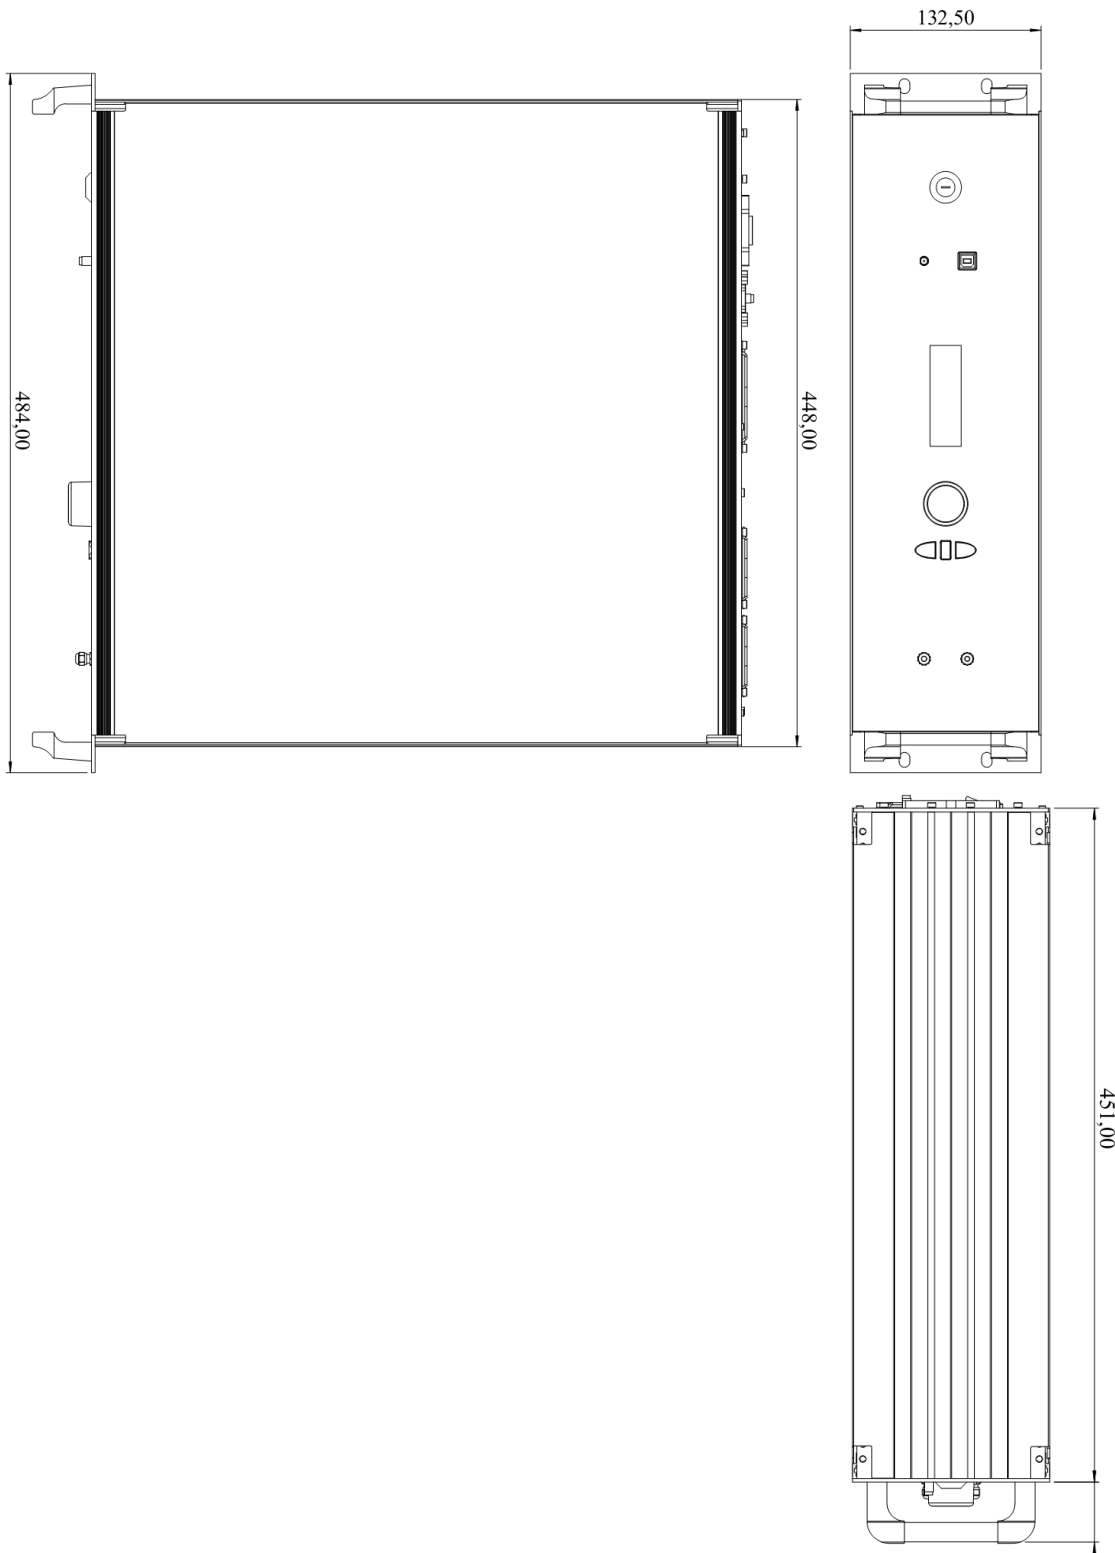

Dimensions are in mm

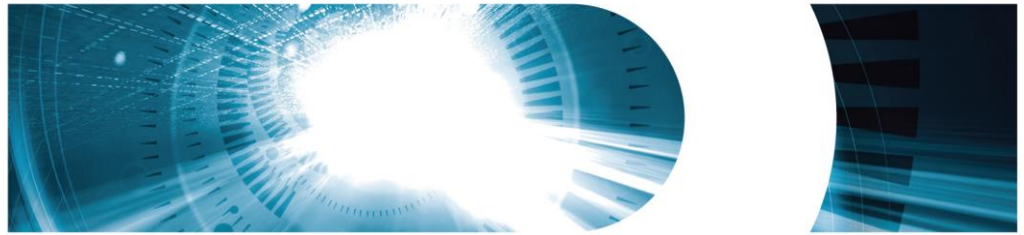

PIN ASSIGNMENT for OEM45 – TTL Trigger


SAMTEC SMM-115-02-S-D-30 female connector

| Description | Pin N° | | Description |
|--|--------|----|--|
| +12 V DC | 2 | 1 | +12 V DC |
| +12 V DC | 4 | 3 | +12 V DC |
| GND | 6 | 5 | GND |
| RS232 TX (TTL input) | 8 | 7 | RS232 RX (TTL output) |
| GND | 10 | 9 | GND |
| Reserved - do not connect | 12 | 11 | External trigger input (TTL, high impedance) |
| Burst input (TTL input) | 14 | 13 | Laser activation input ADI <i>TTL low : laser ON</i> <i>TTL high or disconnected : laser OFF</i> |
| Reserved - do not connect | 16 | 15 | Unit case temperature alarm (TTL output) |
| Laser diodes current alarm (TTL output) | 18 | 17 | Laser temperature alarm (TTL output) |
| Laser operating status output (TTL output) | 20 | 19 | Trigger alarm (TTL output) |
| GND | 22 | 21 | GND |
| Reserved - do not connect | 24 | 23 | Reserved - do not connect |
| GND | 26 | 25 | GND |
| +12 V DC | 28 | 27 | +12 V DC |
| Void | 30 | 29 | +12 V DC |

PIN ASSIGNMENT for OEM45 – LVDS Trigger

SAMTEC SMM-115-02-S-D-30 female connector

| Description | Pin N° | | Description |
|--|--------|----|--|
| +12 V DC | 2 | 1 | +12 V DC |
| +12 V DC | 4 | 3 | +12 V DC |
| GND | 6 | 5 | GND |
| Reserved - do not connect | 8 | 7 | Reserved - do not connect |
| GND | 10 | 9 | GND |
| Reserved - do not connect | 12 | 11 | Reserved - do not connect |
| Burst input (TTL input) | 14 | 13 | Laser activation input ADI <i>TTL low : laser ON</i> <i>TTL high or disconnected : laser OFF</i> |
| Reserved - do not connect | 16 | 15 | Unit case temperature alarm (TTL output) |
| Laser diodes current alarm (TTL output) | 18 | 17 | Laser temperature alarm (TTL output) |
| Laser operating status output (TTL output) | 20 | 19 | Trigger alarm (TTL output) |
| GND | 22 | 21 | GND |
| External trigger LVDS B | 24 | 23 | External trigger LVDS A |
| GND | 26 | 25 | GND |
| +12 V DC | 28 | 27 | +12 V DC |
| Void | 30 | 29 | +12 V DC |

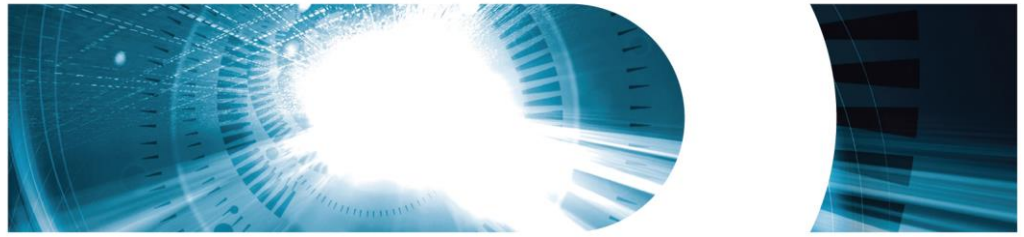

PIN ASSIGNMENT for OEM65 and OEM75

SUB-D 25 connector

| Description | Pin N° | | Description |
|--|--------|----|--|
| GND | 14 | 1 | Pump power analog modulation input (0-10 V) - optional |
| Current alarm (active TTL high) | 15 | 2 | Reserved - do not connect |
| Temperature alarm (active TTL high) | 16 | 3 | Reserved - do not connect |
| +5 V DC output | 17 | 4 | Reserved - do not connect |
| Global enable (TTL input) | 18 | 5 | Reserved - do not connect |
| Power amplifier modulation input (active TTL high) | 19 | 6 | Reserved - do not connect |
| Reserved - do not connect | 20 | 7 | Reserved - do not connect |
| Reserved - do not connect | 21 | 8 | Reserved - do not connect |
| Reserved - do not connect | 22 | 9 | Reserved - do not connect |
| Emergency stop input <i>TTL high : laser ON</i> <i>TTL low or disconnected : laser OFF</i> | 23 | 10 | GND |
| Reserved - do not connect | 24 | 11 | RS232 RX |
| GND | 25 | 12 | RS232 TX |
| | | 13 | GND |

SUB-D 2W2 connector

| Description | Pin N° | | Description |
|-------------|--------|----|-------------|
| GND | A2 | A1 | +12 V DC |



LASER SAFETY INFORMATION

This fiber laser emits invisible light. Take appropriate precautions to prevent undue exposure to naked eye when the laser is in operation. This product is classified Class 4 Laser Product according to IEC-60825-1. This laser is only intended for integration into other equipment. The system does not comply with CDRH 21 CFR 1040.10 or EN 60825-1. The customer is responsible for CDRH and/or 60825-1 compliance of their system.

HANDLING

Caution! Handle the sub-system by its package only; never hold it by its pigtail.

Care should be taken to avoid supply transient currents and voltages.

Drive voltage out of the specified electro-optical characteristics section may cause permanent damage to the device.



ORDERING INFORMATION

ISRUZ FIBER LASER PRODUCT FAMILY

| Nominal Power | Part number | |
|---------------|----------------------------|--------------------|
| | OEM | RACK |
| 5 W | ML5-CW-p-OEM45-15ww-i-m | ML5-CW-p-TKS -15ww |
| 10 W | ML10-CW-p-OEM65-15ww-i-m-e | ML10-CW-p-TKS-15ww |
| 20 W | ML20-CW-p-OEM65-15ww-i-m-e | ML20-CW-p-TKS-15ww |
| 30 W | ML30-CW-R-OEM75-15ww-0-0-0 | ML30-CW-R-TKS-15ww |
| 40 W | ML40-CW-R-OEM75-15ww-0-0-0 | ML40-CW-R-TKS-15ww |

p: polarization; **R** = random / **P** = linear

ww: operating wavelength; **50** = 1550 nm / **65** = 1565 nm

Available options codification:

| Symbol | Description | 0 | 1 |
|--------|-------------------|--------------------------------|---------------------------------|
| i | output isolator | not installed | installed |
| m | control mode | ACC only | ACC & APC |
| e | control interface | E204 interface board for RS232 | E229 interface board for analog |

Other options upon request:


- Custom collimator
- Extended warranty

3SPGroup can also develop custom products to meet a wide range of technical requirements. Please contact your Sales Manager for details.

ISRUZ

1.5 μm CW
High Power
Fiber Laser

3SP Group

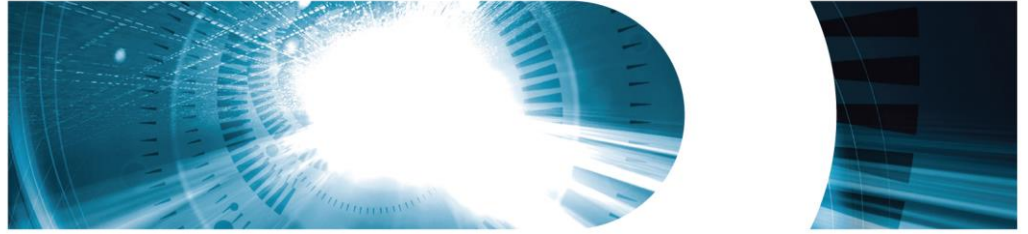

CONTACT INFORMATION

Europe & Asia: +33 169 805 833
North America: +1 514 748 4848
+1 888 922 1044

sales@3spgroup.com
www.3spgroup.com

IMPORTANT NOTICE

Information in this document is typical and must be specifically confirmed in writing by your supplier before it becomes applicable to any order or contract.

Information is subject to change without notice.

NOTES