

Multimode Components

KeyFeatures

High Power Transfer Efficiency

Preservation of Modal Content

Wavelength Insensitive

Custom Configurations Available

RoHS Compliant

Applications

PM Fiber Lasers

PM Fiber Amplifiers

(2 + 1) x 1 PM HIGH POWER Pump and Signal Combiners

3SPGroup' Multimode Pump and Signal Combiners feature exceptional optical characteristics. These devices can be used to combine the power from several multimode laser diodes and couple that power with a signal feed, delivering the combined power for applications in industrial, military, medical and telecommunications markets.

3SPGroup' Multimode Combiners offer efficient power transfer for high power applications like fiber lasers and fiber amplifiers, with a maximum conservation of brightness. The Multimode Combiners can be designed to meet a wide range of power handling configurations, number of input fibers and adaptation to different fiber types.


For moreInfo

Please contact us at:

North America: **514.748.4848**

888.922.1044

Europe & Asia: **+33 (0) 1 69 80 58 33**
or via e-mail at sales@3spgroup.com

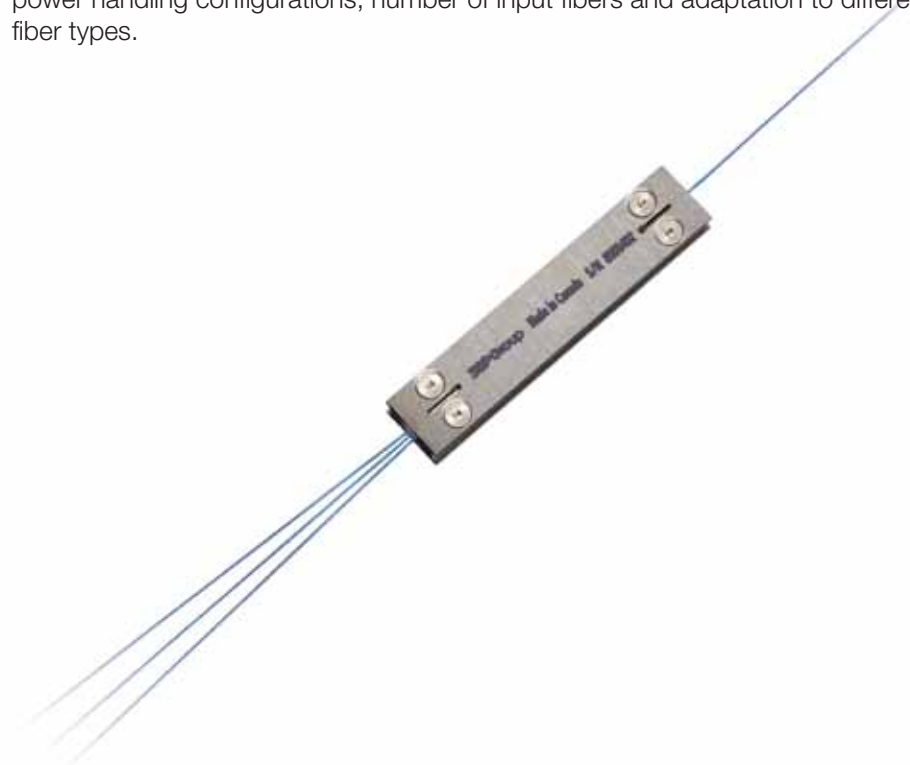

Multimode Components



(2 +1) x 1 PM HIGH POWER Pump and Signal Combiners

SPECIFICATIONS* STANDARD CONFIGURATIONS

Product Code	PMC02112A71	PMC02112411	PMC02112631	PMC02113631
Optical Specifications				
Signal Operating Wavelengths	1040-1080 nm			
Pump Operating Wavelengths	800-1000 nm			
Number of Multimode Inputs	2			
Number of Signal Ports	1			
Number of DCF Ports	1			
Pump Input Fiber Core/clad diameter NA	105/125 μ m 0.22			200/220 μ m 0.22
Signal Input Fiber Core/clad diameter NA	PM 10/125 μ m 0.08/0.46	PM 15/130 μ m 0.08/0.46	PM 25/250 μ m 0.11/0.46	PM 25/250 μ m 0.11/0.46
Output Fiber Core/clad diameter NA	PM 10/125 μ m 0.08/0.46	PM 15/130 μ m 0.08/0.46	PM 25/250 μ m 0.11/0.46	PM 25/250 μ m 0.11/0.46
Power per Multimode Input	50W		25W	50W
Total power	100W		50W	100W
Maximum Pump Insertion Loss	< 0.5 dB		< 0.75 dB	
Maximum Signal Insertion Loss	< 0.35 dB		< 0.5 dB	
Optical Return Loss	35 dB			
Polarization Extinction Ratio	20 dB			
Mechanical Specifications				
Dimensions	60 x 12 x 6.5 mm			
Fiber Pigtail Length Input/Output (1)	A=1000 mm B=2000 mm C=3000 mm			

(1) Pricing is dependant on fiber pigtail length
*Specifications subject to change without notice.
Revised May 2012

Please note: information in this document is typical and must be specifically confirmed in writing by your supplier before it becomes applicable to any order or contract.
Information is subject to change without notice.
©2011 3S PHOTONICS S.A.S.

PATENT PENDING

3SPGroup
North America: 514.748.4848
888.922.1044

Europe and Asia: +33 (0)1 69 80 58 33
www.3spgroup.com • sales@3spgroup.com

ORDERING INFO

Please contact your Sales Manager. 3SPGroup can also develop custom products to meet a wide range of technical requirements.

