

## MLT-PL-R-OEM15 Series

### Key Features

- High energy up to 50 $\mu$ J
- Wide range of fixed pulse duration available from 500ps to 1.25 $\mu$ s
- Excellent beam quality ( $M^2 < 1.1$ )
- Adjustable pulse duration on few ns
- Burst mode
- Monitor output
- Internal or external TTL or LVDS trigger
- Maintenance free operation
- Highly reliable laser diode pumps
- Operating temperature from -35°C to +65°C
- Compact & rugged design
- Very low power consumption
- Air cooled
- Custom versions available

### Applications

- LIDAR
- Target ID
- Mapping
- Telemetry
- 3D scanning
- Range finding
- Topography scanning
- Weather and pollutant detection
- YOUR APPLICATION

### For more info

Please contact us at:  
North America: **514.748.4848**  
**888.922.1044**  
Europe & Asia: **+33 (0) 2 96 04 20 00**  
or via e-mail at [sales@3spgroup.com](mailto:sales@3spgroup.com)

## MENTAD Product Line



### 1.5 $\mu$ m Miniaturized Pulsed Fiber Laser Transmitter

The MLT-PL-R-OEM15 is a miniaturized (90 x 70 x 15 mm<sup>3</sup> only) pulsed fiber laser providing short to ultra short pulse duration (0.5ns to 1250ns fixed pulse duration available) through a near diffraction limited randomly polarized beam ( $M^2 < 1.1$ ). The MLT-PL-R-OEM15 is optimised for LIDAR, telemetry or range finding application. The design and configuration of this laser render it unique and reliable. Our patented "Injection Technology" allows the use of highly reliable broad area laser diode pumps, for a cost-effective and maintenance-free operation. The all-fibre design guarantees the robustness of the system, without any optical parts to align or to stabilise. The MENTAD is an open platform for your specific requirements : internal or external LVDS or TTL trigger, monitor output for synchronization, burst mode for pulse monitoring, adjustable pulse width duration on few ns. The simple integration of the OEM system requires no after-installation service. Power consumption is reduced to the minimum with extended operation temperatures. Obviously, custom configurations are possible.



## MENTAD Product Line

1.5µm Miniaturized Pulsed Fiber  
Laser Transmitter

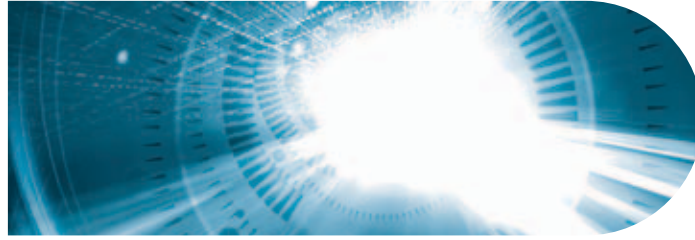

### MLT-PL-R-OEM15 Series

### SPECIFICATIONS\* STANDARD CONFIGURATIONS

Parameter	Value	Unit	
Operation mode	Pulsed	-	
Seed laser wavelength	1550 typ.	nm	Other wavelengths available
Average output power	up to 1200	mW	
Pulse duration	from 0.5 to 1250	ns	Fixed duration in the range
Pulse repetition frequency	from 5 to 2000	kHz	in a limited range depending on pulse width and ASE
Output pulse energy	≤ 50	µJ	
Peak power	up to 9	kW	
Output power tunability	1 – 100	%	
Long term stability (RMS, over 1h@25°C)	< +/- 1	%	
Polarization	Random	-	PM optional
Output fibre length	typ. 50	cm	
Output fibre termination	FC/APC or Collimated beam	-	
Laser linewidth (FWHM)	<0.2	nm	0.15 nm typical
Typical beam diameter @1/e <sup>2</sup>	2,4	mm	for collimator
Beam quality M <sup>2</sup>	<1.1	-	
Dimensions	90 x 70 x 15	mm <sup>3</sup>	
Weight	130	g	
Operation Temperature	0 to +50	°C	-35 to +65 optional
Control mode	Continuous operation or burst	-	
Connector	SAMTEC SMM-115-02-SD-30		
Operating voltage DC	5	V	
Typ. power consumption (nom. power @ 25°C)	<15	W	

#### Ordering Information:

xx = pulse duration in ns  
yy = pulse repetition frequency in kHz  
zz = energy in µJ


#### Options:

- Adjustable pulse duration (few ns)
- Internal or external trigger
- TTL or LVDS trigger
- Collimated output
- Burst mode
- Monitor output
- Customised specs on request
- Extended warranty

The 3SPGroup Fibre lasers emit both invisible Class IV and visible Class II radiations. Direct and scattered radiation can be harmful to the human eye. Proper laser safety eyewear must be worn during operation. Information in this document is subject to change without notice.

Operating and safety considerations  
3SPGroup Fibre lasers comply with CE, FDA & RoHS. All 3SPGroup Fibre Lasers are patent pending.

Revised March 2012

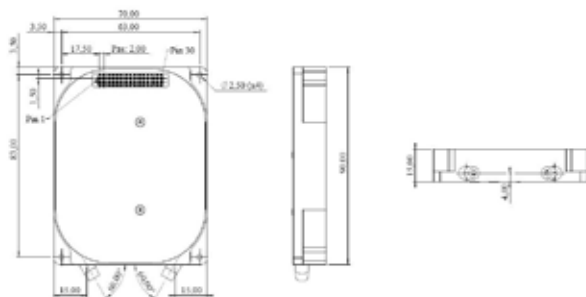

Please note: information in this document is typical and must be specifically confirmed in writing by your supplier before it becomes applicable to any order or contract. Information is subject to change without notice.  
©2011 3S PHOTONICS S.A.S.



**3SPGroup**  
North America: 514.748.4848  
888.922.1044

Europe and Asia: +33 (0) 2 96 04 20 00  
www.3spgroup.com • sales@3spgroup.com

## ORDERING INFO

Please contact your Sales Manager. 3SPGroup can also develop custom products to meet a wide range of technical requirements.